

SOLUCIONES INALAMBRICAS EN CASAS Y EMPRESAS.


**MTM-200 Terminal Celular GSM
(850 ~ 900 ~ 1800 ~ 1900) Mghz.**

**Si lleva mucho tiempo esperando esta es la solución
Una Línea telefónica análoga en el lugar que la necesite**



**MTM-400 Terminal Celular GSM
(850 ~ 900 ~ 1800 ~ 1900) Mghz**

**Cuatro Líneas telefónicas en el lugar que las necesite
Para conectar a su central telefónica con tarjeta SIM.**

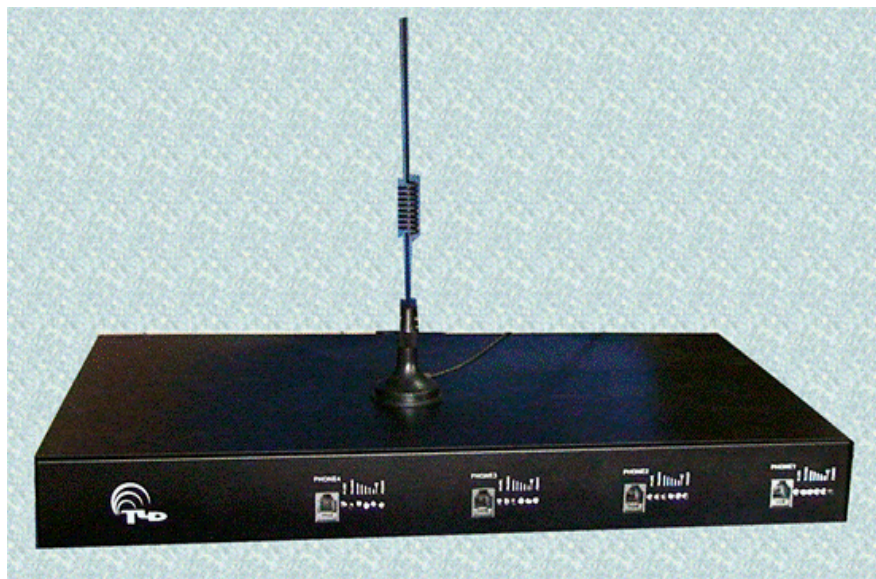

EL SISTEMA MAS NOVEDOSO DEL MERCADO PARA TENER INTERNET
EN CUALQUIER PARTE QUE ESTE DONDE HALLA SEÑAL GSM

3.75G/3.5G HSUPA/HSDPA USB MODEM

D56/57



78.9x26.9x11.8mm

Downlink: HSDPA 3.6Mbps/HSUPA 7.2Mbps
Uplink: HSDPA 384Kbps/HSUPA 2Mbps
UMTS 850/900/1900/2100MHz selectable
* *Optional Micro SD slot: 4GB maximum*
Optional internal storage: 1/2/4/8GB

D78/79



80x27.2x12.5mm

Downlink: HSDPA 3.6Mbps/HSUPA 7.2Mbps
Uplink: HSDPA 384Kbps/HSUPA 2Mbps
UMTS 850/1900/2100MHz selectable
* *Optional Micro SD slot: 4GB maximum*

D71/72



80x24x10mm

Downlink: HSDPA 3.6Mbps/HSUPA 7.2Mbps
Uplink: HSDPA 384Kbps/HSUPA 2Mbps
UMTS 2100MHz only
* *Optional Micro SD slot: 4GB maximum*



COMMON SPECIFICATIONS

- HSDPA 3GPP R5, up to 3.6Mbps DL & 384Kbps UL, category 5/6
- HSUPA 3GPP R6, up to 7.2Mbps DL & 2Mbps UL, category 7/8
- UMTS up to 384Kbps DL & UL
- EDGE 3GPP Release4, class 12, up to 237Kbps DL & 118Kbps UL
- GPRS Multislot class 10, up to 85.6Kbps DL & 42.8Kbps UL
- Support OS: Windows 2000, XP, Vista 32bit/64bit
- Mac Book, Mac Book Pro, iMac, Mac Pro or Max mini(Intel CUP)
Mac OS 10.4.9 or higher(connect to internet only)

!!! QUE AUN NO TIENE INTERNET !!!!
INTERNET INALAMERICA PARA SU EMPRESA A MUY BAJO COSTO
PARA LUGARES DONDE NO HAY RED O PARA TENER UN SISTEMA DE
RESPALDO EN CASO AVERIAS EN EL CABLE

HSUPA WiFi Router WR072



Technical Specification

- **Air Interface :**
UMTS(HSPA): 850/1900/2100MHz
EDGE/GPRS/GSM: 850/900/1800/1900MHz
- **HSUPA :** 7.2Mbps downlink/2Mbps uplink
UMTS : 384Kbps downlink/384Kbps uplink
- **AC/DC Power Supply :**
Input: AC100~240V/50~60Hz, 0.68A
Output: DC5.2V/3000mA
- **Connectors :**
1 USB port for connecting with printer
4 RJ-45(LAN) port
1 RJ-11(phone) port
1 DC power input jack
- **Antenna :** Internal WiFi/2G/3G high gain antenna;
optional external antenna version available
- **Indicators :** Power, Diagnosis, 2G/3G Signal, Coming call, WLAN and Ethernet LAN(1~4)
- **WiFi :** 802.11b/g protocol



Main Features

- 9 LED indicators: PWR/Diagnosis/Signal/WLAN/Coming Call/Ethernet LAN
- Built-in HSUPA modem at a rate of 7.2Mbps downlink/2Mbps uplink
- Supporting Web base Management and plug & play
- Supporting DHCP Server, NAT, Virtual Server, SNTP, Static Routing, DNS Relay, UPnP, DMZ, MAC/URL/IP filter, VPN passthrough, WiFi 802.11b/g
- Supporting Phone Book & SMS function
- RJ-11 phone port for analogue phone connection
- RJ-45 ports for 4 users to log on 3G network (not including WiFi users)
- LAN & WLAN access of high-speed data
- USB port for connecting with printer

Environment

- **Operating temperature :** 0°C to 50°C
- **Operation Humidity :** 10% to 90%
- **Dimensions :** 191mm(L)x118mm(W)x30mm(H)
- **Weight :** <500 g



NO PIERDA TIEMPO CONECIESE YA CONSULTAS: 2240-8175.